

Boosts Yields and Improves Quality

Compact and Lightweight Under Canopy LED fixture

High Transmission Lens that Diffuses Light Evenly and Increases Canopy Penetration

Waterproof Power Port

IP66 Rated




Protection from IPM, watering wands, and irrigation leaks

Easy to clean

Seamless End-To-End Connections





3.0 $\mu\text{mol/J}$ PPE

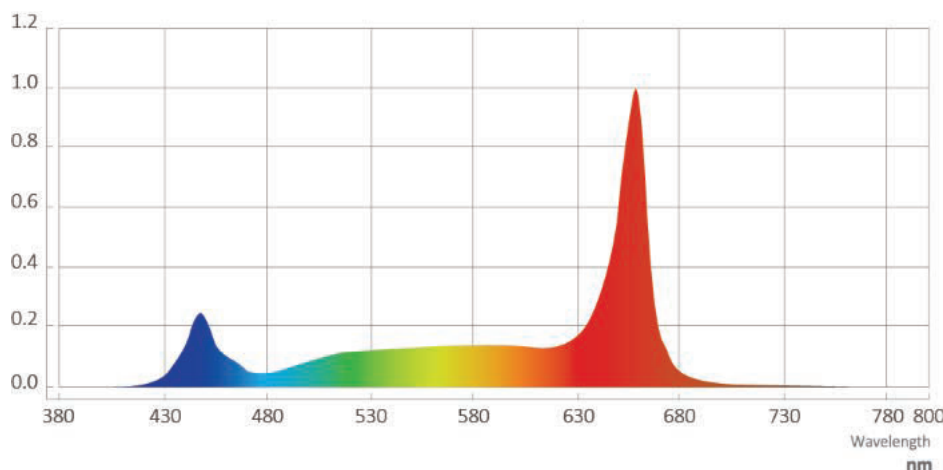

Daisy chain up to 17 lights

Voltage (V)	Max # Connected	Current (A)
120	7	1
240	15	0.5
277	17	0.43

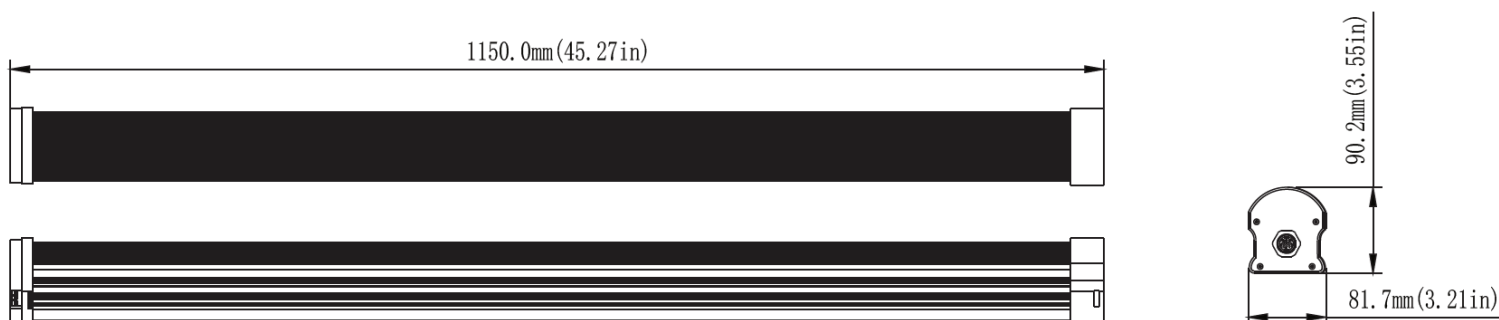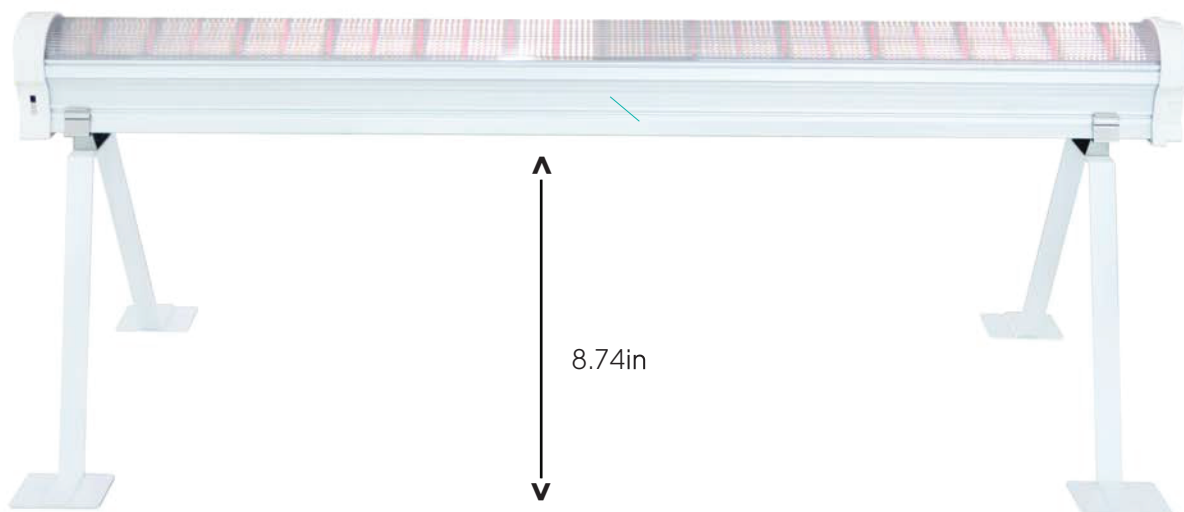

Specifications

PPF: 360 μ mol/s

VOLTAGE: 120V to 277V

FIXTURE WATTAGE: 120W

REPORTED LIFETIME: Q90>50,000 hours

DIMMING PROTOCOL: 0 to 10V

FIXTURE WEIGHT: 5.95 pounds

DISTRIBUTION : 120° Beam Angle

WARRANTY: 5 Years

Nominal Amperage by AC Input Voltage

AC Input	120	208	240	277
Amperage	1A	0.57A	0.50A	0.43A

What's inside the box

BP-UCNP-120-HIRLO2-1:

- (2) BP-UCNP-120-HIRLO1-1 Lights
- (2) BP-000B-000-UCNP02-1 U Mounting Brackets (pair)
- (1) BP-0ACC-000-UCNP02-2 Extension Cable 5-Pin 8in

Available to purchase separately:

- BP-0ACC-000-UCNP02-1 Extension Cable 5-Pin 3ft
- BP-000B-000-UCNP01-1 Supporting V Stand (pair)
- BP-0ACC-000-UCNP01-1 AC/Dimming 5-Pin NEMA 6-15P, RJ14 cord
- BP-0ACC-000-UCNP03-1 AC/Dimming 5-Pin NEMA L7-15P, RJ14 cord
- BP-0ACC-000-UCNP04-1 120V to 240V adapter

****Note: End caps for fixtures are included with both RJ14 cords ****