

## Boosts Yields and Improves Quality

Compact and Lightweight Under Canopy LED fixture

High Transmission Lens that Diffuses Light Evenly and Increases Canopy Penetration

## Waterproof Power Port

IP66 Rated




Protection from IPM, watering wands, and irrigation leaks

Easy to clean

## Seamless End-To-End Connections





3.0  $\mu\text{mol/J}$  PPE

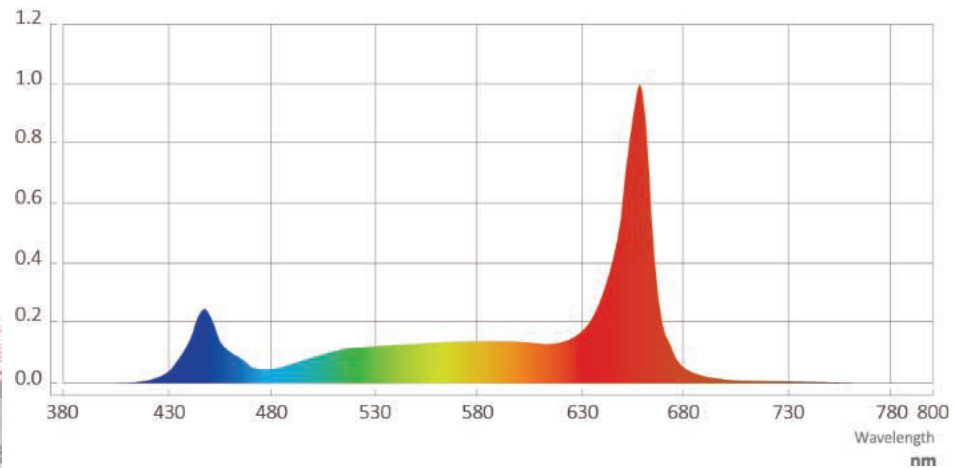

## Daisy chain up to 17 lights

Voltage (V)	Max # Connected	Current (A)
120	7	1
240	15	0.5
277	17	0.43



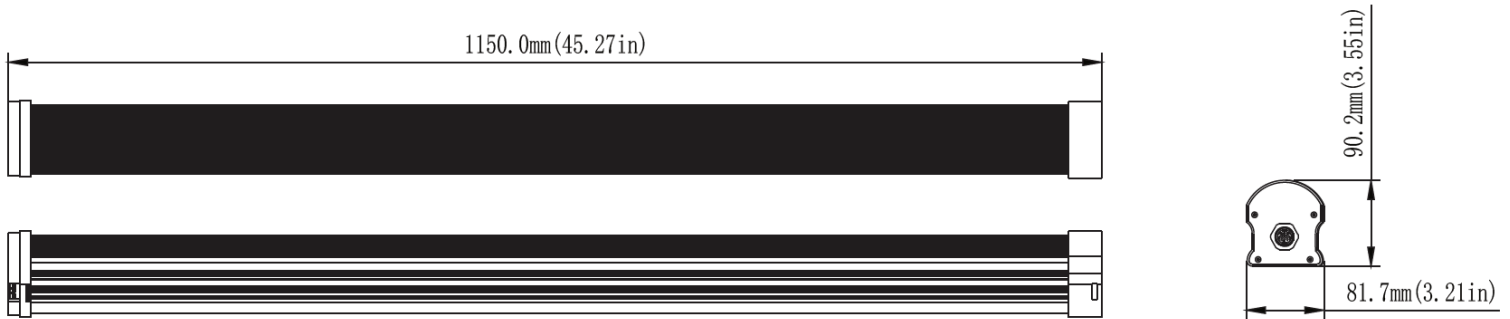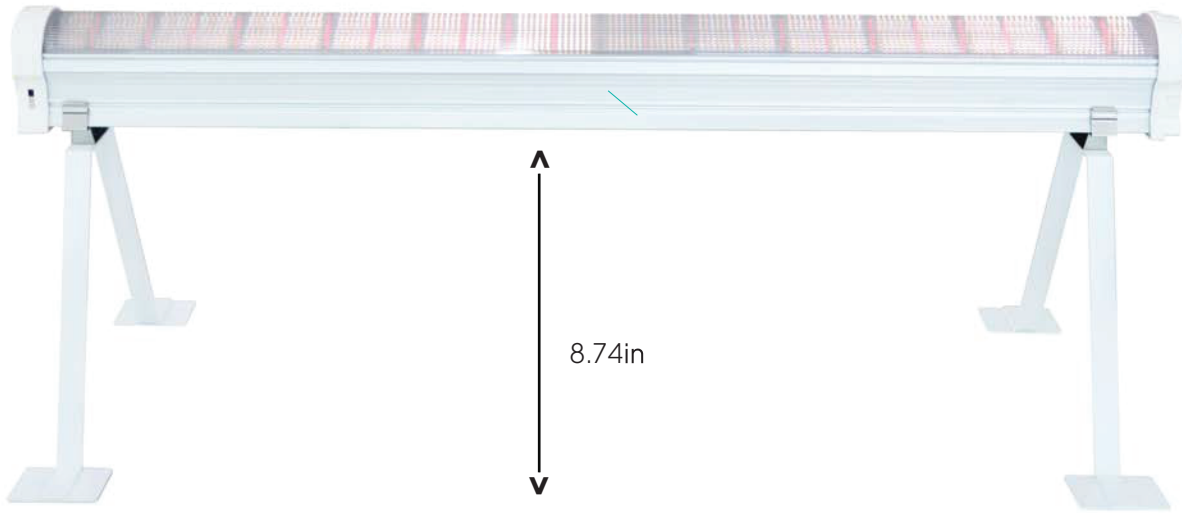

## Specifications

PPF: 360  $\mu$ mol/s

VOLTAGE: 120V to 277V

FIXTURE WATTAGE: 120W

REPORTED LIFETIME: Q90 > 50,000 hours

DIMMING PROTOCOL: 0 to 10V

FIXTURE WEIGHT: 5.95 pounds

DISTRIBUTION : 120° Beam Angle

WARRANTY: 5 Years

### Nominal Amperage by AC Input Voltage

AC Input	120	208	240	277
Amperage	1A	0.57A	0.50A	0.43A

### What's inside the box

#### BP-UCNP-120-HIRLO2-1:

- (2) BP-UCNP-120-HIRLO1-1 Lights
- (2) BP-000B-000-UCNP02-1 U Mounting Brackets (pair)
- (1) BP-0ACC-000-UCNP02-2 Extension Cable 5-Pin 8in

#### Available to purchase separately:

- BP-0ACC-000-UCNP02-1 Extension Cable 5-Pin 3ft
- BP-000B-000-UCNP01-1 Supporting V Stand (pair)
- BP-0ACC-000-UCNP01-1 AC/Dimming 5-Pin NEMA 6-15P, RJ45 cord
- BP-0ACC-000-UCNP03-1 AC/Dimming 5-Pin NEMA L7-15P, RJ45 cord
- BP-0ACC-000-UCNP04-1 120V to 240V adapter